

## PRODUCT DESCRIPTION

**Product name:** SENOSAN by CVN glass-effect furniture board

**Type of use:** acrylic polymer, non-porous, highly scratch-, acid-, impact- and UV-resistant indoor furniture board.


**Use:** can be used indoor, at room temperature and normal humidity areas (such as: living rooms, staircases, bedrooms, kitchens, bathrooms, hotel lobbies, sliding doors, etc.), primarily for covering vertical wall surfaces. Hygienic, suitable for contact with food, resistant to fungi, bacteria, common household chemicals, disinfectants and materials.

Our boards represent outstanding interior design value, our products with **0,5-0,8 mm acrylic sheet** are highly resistant to everyday use. Our SENOSAN products are sold in glossy and matt finishes. Our edge closures are made with PU edge closures, are watertight, and can also be placed in wet rooms. Our SENOSAN products comes with an embossed counter-pull **rear side**. Custom made double-sided acrylic sheets with color matching rearside is also available.

### High Gloss SENOSAN by CVN surface characteristics:



### Matt SENOSAN by CVN surface characteristics:

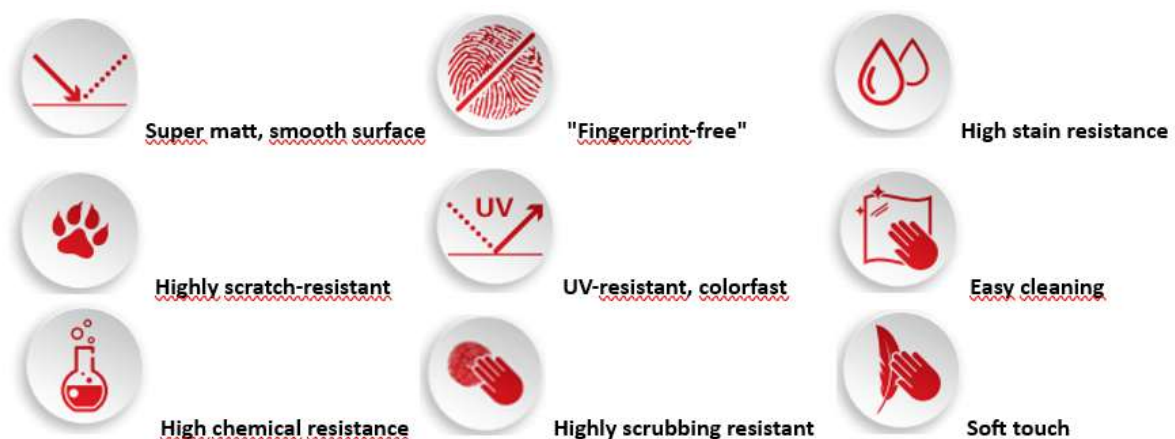

**Features:**

SENOSAN by CVN glass-effect furniture panels can be processed with known woodworking tools (drilling/milling/cutting). In case of cutting, pre-cutting must be used.

**High impact resistance****Easy to process****14kg/m<sup>2</sup>****Product thickness:****Matt surfaces: 17,2mm****Gloss surfaces: 17,4mm****Metal surfaces: 17,6mm**

**IMPORTANT!** When closing the edges, please specify the finished cutting dimensions.

When ordering, please note that the smallest dimensions that can be closed are:

when closing the long side, the width: 60 mm

when closing the short side, the width: 150 mm

3 hinges are recommended for products over 900mm.

At a length of 900mm, a curvature "tension" of 0-3mm is acceptable, for larger sizes this may be increased. It can be adjusted and corrected during installation and strapping.

**Cleaning:**

Warm water and liquid detergents are good for cleaning the acrylic surface.

Dust can be easily removed with a damp sponge.

Stubborn, greasy stains can be removed with benzene-free petroleum ether, isopropyl alcohol.

The recommended cleaning agents and materials are as follows:

- lukewarm water with liquid dishwashing detergent
- soft, damp sponge or lint-free microfiber cloth

Mechanical tools such as knives, scrapers or rough scrubbers should not be used for cleaning.

Strong solvents, chemicals, special cleaning agents (e.g. drain cleaner, industrial cleaner), corrosive abrasives can damage the wear-resistant coating.

Never wipe dry and always use a non-abrasive cleaner.

**TECHNICAL DATA**

<b>Chemical resistance</b>	
<b>Chemical name</b>	<b>Test period</b>
Acetone	>24 hrs
Citric acid (10%)	>24 hrs
Disinfectant	>24 hrs
Ethyl-alcohol	>24 hrs
Ethyl acetate	>24 hrs
Buthyl-acetate (1:1)	>24 hrs
Petrol	>24 hrs
Hydrochloric acid (32%)	>24 hrs
Isopropil-alcohol	>24 hrs
Methyl-alcohol	>24 hrs
Sodium carbonate (10%)	>24 hrs
Sodium chloride (15%)	>24 hrs
Sodium hydroxide (30%)	>24 hrs
Sulfuric acid (30%)	>24 hrs
Toluol	>24 hrs

The chemical resistance of the scratch-resistant test materials was tested according to DIN EN 12720. The surface of the panels was visually inspected after the following time intervals: 15 minutes, 1 hour and 24 hours. The surface showed no changes after the above-mentioned time.

**Other properties**

Scratch resistance: Martindale / ONR CEN/TS 16611 / IHD-W-466 / Class 1

This information and all further technical advice is based on our current knowledge and experience. However, this does not imply any legal obligation or liability on our part. There is no express or implied guarantee or warranty of product properties in the legal sense. We reserve the right to change the product and its characteristics in accordance with technological progress or further developments. The customer is not released from his duty of care, inspection and testing of incoming goods. The performance of the product, as described here, must be verified by testing, which may only be carried out by qualified experts, under the sole responsibility of the customer.

**Transport:**

- when receiving the goods, make sure that the product is intact. If you have any comments, please inform the person who delivered the product. In the case of delivery, a written report must be made to the carrier.
- when transporting the product, it must be taken into account that the board panel cannot be stored at extreme temperatures (room temperature +- 5 degrees Celsius) beyond the duration of the transport, in order to avoid possible chemical reactions. Possible poor storage conditions may cause deformation of the product. If you experience such a problem, please notify your contact person as soon as possible, because these changes can be professionally treated.
- recommended transport method: on a pallet, at least 4 edged boards, other wooden frame
- transport temperature must not exceed 45 °C or be lower than 15 °C.

**Storage:**

- laid on a horizontal and dry base, supported across its entire width
- in a closed and heated room, between 20 and 25 °C and with a relative humidity of 40-60%

Deformations resulting from improper storage:

In case of storage/transportation that is too hot: positive curvature

In case of storage/transportation that is too cold: negative curvature.

**Unpacking:**

- 24 hours of acclimatization must be ensured before unpacking the sheets
- after removing the protective film, the sheet reaches its full material strength within 48 hours

When opening the packaging, be careful not to damage the surface, and do not damage your product by shifting or tipping it over!

**Warranty conditions:**

- the sheets can only be delivered in a foiled state
- no warranty can be assumed for warping resulting from improper transportation and/or storage
- the elements must NOT be stored outdoors or in damp places, at excessively high or low temperatures
- other elements must not be placed on the laminates
- we cannot assume a warranty for damage resulting from processing and/or installation - when installing the product, attention must be paid to voltage relief
- agents with strong chemical effects cannot be used for surface treatment (e.g. abrasives, drain cleaners, etc.)
- when cleaning, a microfiber cleaning cloth is recommended to avoid scratches
- in the case of a special order, a color difference of 2-5% is allowed

Our products are resistant to the acidic and alkaline effects of general foods, and have limited resistance to organic solvents.

The warranty can be claimed for manufacturing defects, in the case of the SENOSAN by CVN product line we provide a 5-year warranty. Warranty complaints can only be claimed after the product has been tested. In all cases, we will compensate you by replacing the product.

For other cases, the general warranty conditions apply.